


Heavy Duty Continuous Band Sealer

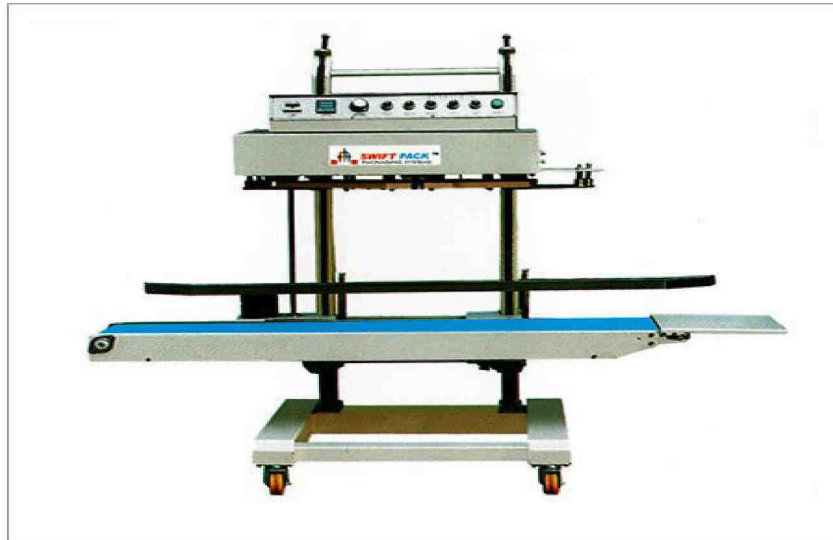

Specifications:

Model	SPCS 1100
Voltage (V/Hz)	220/50
Power (W)	230
Heat Sealing Power (W)	300x4
Sealing Speed (M/Min)	0 ~ 10
Sealing Width (Mm)	8 ~ 10
Temperature range (Deg.c)	0 ~ 300
Conveyor size (L x W) (Mm)	1400x250
Film Thickness (Mm)	0.12 to 0.18
Single Conveyor Loading (Kg)	5
Overall Conveyor Loading (Kg)	15
Overall Dimension (LxWxH) (Mm)	1450 x 680 x 1480
Net Weight (Kg)	107

Continuous Band Sealer Machine



Technical Specifications:

Model	SPCS 900 V
Voltage (V/Hz)	220/50
Power (W)	650
Sealing Speed (m/min)	0 ~ 12 (0 ~ 16)
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.C)	0 ~ 300
Distance from the sealing center to the conveying table (mm)	15 ~ 270
Conveyor size (L x W)mm	840 x 153
Film Thickness (mm)	0.08
Single Conveyor Loading (Kg)	1
Overall Conveyor Loading (Kg)	3
Overall Dimension (LxWxH)mm	840 x 380 x 550
Net Weight (Kg)	37

Continuous Band Sealing Machine



Technical Specifications :

Model	SPCS 900 L
Voltage (V/Hz)	220/50
Power (W)	650
Sealing Speed (m/min)	0 ~ 12 (0 ~ 16)
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.C)	0 ~ 300
Distance from the sealing center to the conveying table (mm)	10 ~ 40
Conveyor size (L x W)mm	840 x 153
Film Thickness (mm)	0.08
Single Conveyor Loading (Kg)	1
Overall Conveyor Loading (Kg)	3
Overall Dimension (LxWxH)mm	840 x 380 x 550
Net Weight (Kg)	32

Automatic Cup Filling And Sealing Machine



Technical Specifications:

Model	SPCFS-8
Power	380V 4.5KW
Capacity	7000-9000 cups/min
Filling range	50-250ml
Temperature	0-300
Seal material	PE/Alum
Dimension	3900 x 1300 x 1750mm
Weight(kg)	1050

Air Flushing Continuous Band Sealer



Technical Specifications:

Model	SPCS 900AF (Air Flushing)
Voltage (V/Hz)	220/50
Power (W)	835
Heat Sealing Power (w)	40x2
Sealing Speed (m/min)	0-12 (0-16)
Sealing Width (mm)	8 ~ 10
Temperature range (Deg.c)	0 ~ 300
Distance from the sealing center to the conveying table (mm)	10 ~ 40
Conveyor size (L x W)mm	930x153
Film Thickness (mm)	0.08
Single Conveyor Loading (Kg)	1
Overall Conveyor Loading (Kg)	3
Overall Dimension (LxWxH) mm	1050 x 560 x 900
Net Weight (Kg)	62

Continuous Band Sealer



Technical Specifications:

Model	SPCS 900 L	SPCS 900 V
Voltage (V/Hz)	220/50	220/50
Power (W)	650	650
Sealing Speed (m/min)	0~12 (0~16)	0~12 (0~16)
Sealing Width (mm)	8~10	8~10
Temperature range (Deg.C)	0~300	0~300
Distance from the sealing center to the conveying table (mm)	10~40	150~270
Conveyor size (L x W)mm	840 x 153	840 x 153
Film Thickness (mm)	0.08	0.08
Single Conveyor Loading (Kg)	1	1
Overall Conveyor Loading (Kg)	3	3
Overall Dimension (L x W x H)mm	840 x 380 x 550	840 x 380 x 550
Net Weight (Kg)	32	37

Foot Sealer



Technical Specifications:

Model	SPFS 450 (Impulse Type)	SPFS 650 (Impulse Type)
Sealing Length (mm)	450	650
Sealing Width (mm)	2~5	2~5
Input Voltage (V/Hz)	220 /50	220 /50
Heating Time (sec)	0~2.5	0~2.5
Impulse Power (W)	1250	1500
Case Size (mm)	550x520x880	700x570x880
Weight (kg)	21	24

Manual L Sealer



Technical Specifications:

Model	SPLS -5045M (Manual)
Voltage (V/Hz)	AC 220 /50
Power (kw)	1.0
Packing speed (Pcs/h)	300~500
Max Packaging dimension (L x W x H) (mm)	500x375x250
Max sealing Dimensions (L x h) (mm)	500x375
Net Weight (L x W x H) (mm)	1945x795x1080
Body	80
Weight (Kg)	Powder coated (M.S Type)

Tray Sealer



Technical Specifications:

Model	SPTS-135	SPTS-190	SPTS-200 2P
Container Size (mm)	100*135	142*190	142*190
Sealing Speed (Container/ min)	8-10	8-10	16-20
Power (w)	250-300	400-500	500
Film Size (mm)	140	200	200

Meal Tray Sealer



Technical Specifications:

Model	SPTS-300 5 P	SPTS-300 8 P
Container Size (mm)	305*230	305*230
Sealing Speed (Container/ min)	8-10	8-10
Power (w)	300	300
Film Size (mm)	800	800

Cup Sealer



Technical Specifications:

Model	SPTS-95	SPTS-123	SPTS-69/58 D	SPTS-80 D
Cup Diameter (mm)	95	123	69,58	80
Sealing Speed (Cups/ min)	25-30	25-30	30-50	30-50
Power (w)	300	300	400	400
Film Size (mm)	140	160	225	240

Cling Film Wrapping Sealer



Technical Specifications:

Model	SPTW-550E
Voltage (V/Hz)	AC 220/50
Power (W)	450
Max. Seal width (mm)	550
Max. Tem. (°C)	160
Dimensions (LxWxH) (mm)	610x570x120
Weight (kg)	7.5
Body	S.S. TYPE

Web Sealer



Technical Specification :

Model	SPWS-6540	SP 5540 L-PE
Voltage(V/Hz)	300/50 3 Phase	380/50 3 Phase
Power Consumption	1.5	21
Packing Speeds(pcs/min)	0~12	0~10
Max Packing Dimensions(LxWxH) mm	500x290x380	1450x550x400
Max Sealing Length(mm)	650	
Height of Conveyor (mm)	800+50 (Adjustable)	
Working Air Pressure (kgf/m2)	6	
Dimension (LxWxH) mm	1370x920x1800	2550x850x1500
Conveyor loading(kg)		40
Heating Time(minutes)		10
Cooling Time(minutes)		15
Weight(kg)	300	300